


# 15.0" OPEN FRAME LCD MONITOR SERIES

## Models and Features:

Model	Panel Type					Touch Screen
	Aspect Ratio	Resolution	Brightness	Contrast	Viewing Angle (H/V)	
OFU150A	4:3	1024x768	250	700:1	160/140	None
OFU150ARUE	4:3	1024x768	250	700:1	160/140	Resistive
OFU150G	4:3	1024x768	400	700:1	160/140	None
OFU150GRUE	4:3	1024x768	400	700:1	160/140	Resistive
OFU150F	4:3	1024x768	1700	700:1	160/140	None
OFU150FRUE	4:3	1024x768	1700	700:1	160/140	Resistive

## Specifications:

Signal connector	VGA, DVI
OSD Control	Power, Menu, Up/Down, Auto
Operation Temperature	-30 to 85°C (OFU150G and OFU150F) 0 to 65°C (OFU150A)
Storage Temperature	-20 to 65 °C (OFU150A) -30 to 80°C (OFU150G and OFU150F)
Power Supply	External 12V/4.16A Power Adapter Universal 110-240VAC
Mounting	VESA 75/100 mm Flexible Side Mounting Brackets
Dimension	365x305x60 [mm] 14.37x12x2.36 [inches]
Weight	7.6 lbs; 3.44 Kgs

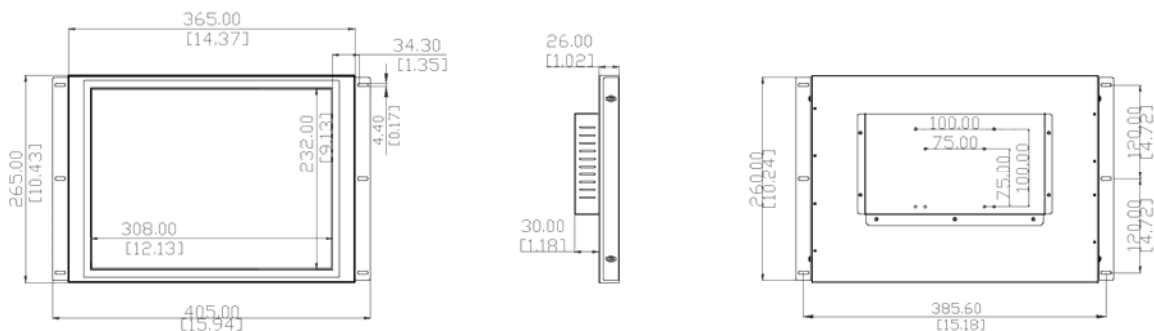

Accuview products options, please check availability. 800-275-4255 or sales@accuview.com

- HDMI input
- Components
- Composite Video
- ATSC TV Coaxial
- Sound, Loud Speakers
- 12VDC
- 24VDC
- Auto Dimming
- Tough Touch Screen >7H
- Surface Acoustic Wave (SAW)
- Vandal Glass